Diffuse reflection

PD-10ML

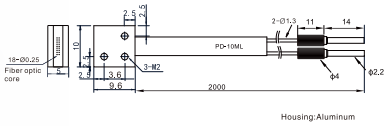

Minimum bending radius: R25
Min-size Detected object: ϕ0.05mm

Sensing distance:
PC1:250mm
PG1:80mm

PD-15ML-D



Minimum bending radius: R25
Min-size Detected object: ϕ0.05mm

Sensing distance:
PC1:200mm
PG1:85mm

PD-20ML-S



Minimum bending radius: R25
Min-size Detected object: ϕ0.05mm

Sensing distance:
PC1:350mm
PG1:150mm

PD-20ML

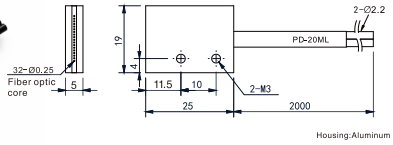

Minimum bending radius: R25
Min-size Detected object: ϕ0.05mm

Sensing distance:
PC1:530mm
PG1:140mm

PD-25ML



Minimum bending radius: R25
Min-size Detected object: ϕ2mm

Sensing distance:
PC1:300mm
PG1:150mm

PD-30ML

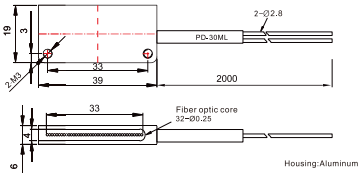

Minimum bending radius: R25
Min-size Detected object: ϕ4mm

Sensing distance:
PC1:300mm
PG1:150mm

PD-35ML



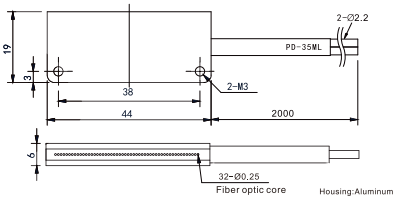

Minimum bending radius: R25
Min-size Detected object: ϕ6mm

Sensing distance:
PC1:450mm
PG1:120mm

PD-50ML

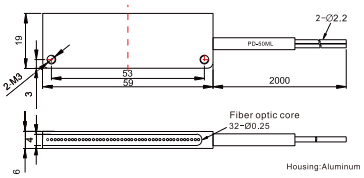

Minimum bending radius: R25
Min-size Detected object: ϕ10mm

Sensing distance:
PC1:260mm
PG1:130mm

PD-A10

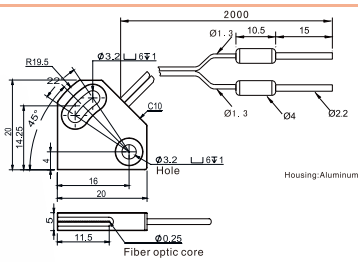

Minimum bending radius: R25
Min-size Detected object: ϕ0.05mm

Sensing distance:
PC1:200mm
PG1:95mm

Thru-beam

PT-10ML

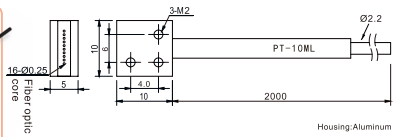

Minimum bending radius: R25
Min-size Detected object: ϕ0.1mm

Sensing distance:
PC1:1500mm
PG1:550mm

PT-15ML-D





Minimum bending radius: R25
Min-size Detected object: ϕ0.5mm

Sensing distance:
PC1:1200mm
PG1:550mm

PT-20ML

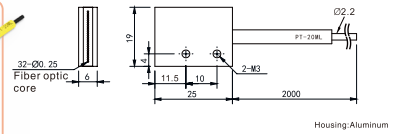

Minimum bending radius: R25
Min-size Detected object: ϕ0.5mm

Sensing distance:
PC1:1500mm
PG1:600mm

PT-25ML





Minimum bending radius: R2
Min-size Detected object: ϕ2.0mm

Sensing distance:
PC1:1000mm
PG1:600mm

PT-30ML



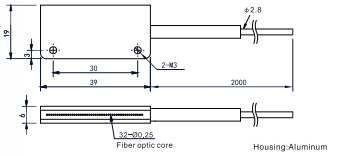

Minimum bending radius: R25
Min-size Detected object: ϕ3.0mm

Sensing distance:
PC1:3000mm
PG1:1000mm

PT-35ML





Minimum bending radius: R25
Min-size Detected object: ϕ4.0mm

Sensing distance:
PC1:1000mm
PG1:550mm

PT-50ML



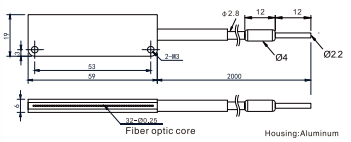

Minimum bending radius: R25
Min-size Detected object: ϕ5.0mm

Sensing distance:
PC1:1100mm
PG1:600mm

PT-E11M





Minimum bending radius: R2
Sensing distance: 3000mm
Min-size Detected object: ϕ1.0mm
(Sensing distance varies with different amplifiers)

PT-120ML

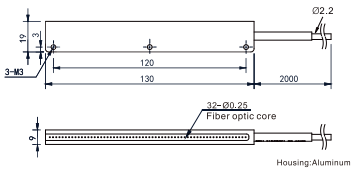

Minimum bending radius: R25
Min-size Detected object: ϕ30mm

Sensing distance:
PC1:4000mm
PG1:1200mm

PT-A10



Minimum bending radius: R25
Min-size Detected object: ϕ0.05mm

Sensing distance:
PC1:3000mm
PG1:650mm

*PG1: TEGA with a threshold setting of 200;
PC1: 7-step with a threshold setting of 200.
*Cable length listed above can be customized.

Fiber Optic
Slot Sensors
Photoelectric
Laser
Proximity
Displacement
Magnetic
Contact
Area
Ultrasonic
Vision
Code Readers
Vibration
Temperature
Accessories
Guidance
Fiber amplifiers
Economical
Standard
Ultra high speed
Fiber components
Regular type
Array-type
Flat bracket type
Side-view type
High flexible type
High temperature resistant
Small spot type
Combination type
High end type
Fiber lens
Fiber lens