


**PD-X20**



**HOT**

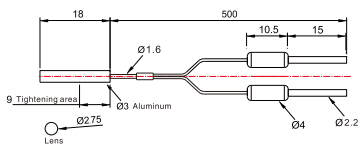

Size:  $\phi 3$   
 Minimum bending radius: R25  
 Focal distance: 5mm


Sensing distance:  
 PC1:25mm  
 PG1:20mm

**Combination type** Fiber components

**PD-S4Q3-30**




**Customizable**

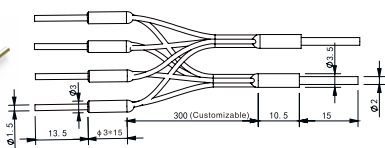

Size:  $\phi 3$   
 Fiber optic sensor heads: 4 Units

Sensing distance:  
 PC1:250mm  
 PG1:150mm

**PD-S10Q1.5-100**

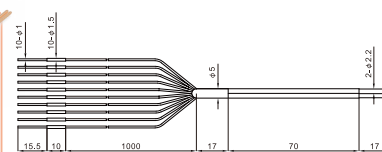

Size:  $\phi 1.5$   
 Fiber optic sensor heads: 10 Units

Sensing distance:  
 PC1:80mm  
 PG1:20mm

Fiber Optic

- Slot Sensors
- Photoelectric
- Laser
- Proximity
- Displacement
- Magnetic
- Contact
- Area
- Ultrasonic
- Vision
- Code Readers
- Vibration
- Temperature
- Accessories

Guidance

Fiber amplifiers

- Economical
- Standard
- Ultra high speed

Fiber components

- Regular type
- Array-type
- Flat bracket type
- Side-view type
- High flexible type
- High temperature resistant
- Small spot type
- Combination type
- High end type

Fiber lens

- Fiber lens