



Diffuse reflection


PD-W32-Q

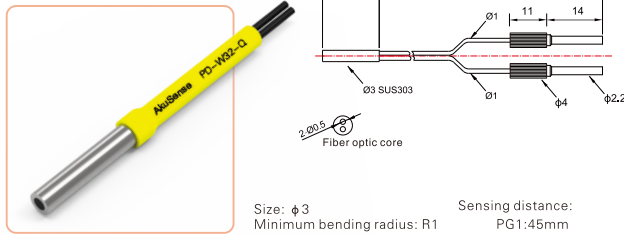


PD-W48

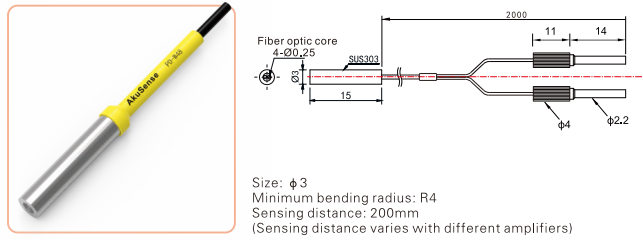

PD-W69Y

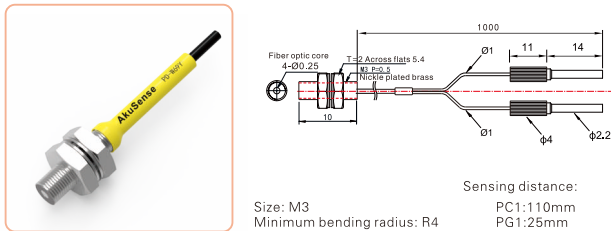


PD-W68

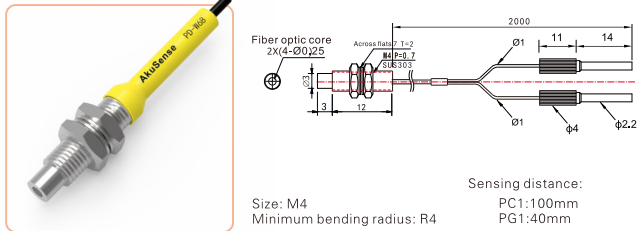


Thru-beam


PT-W59

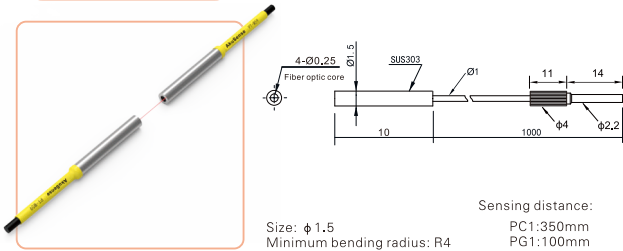

PT-W79

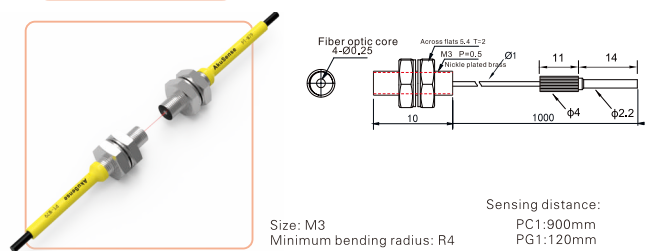

PT-W57UF

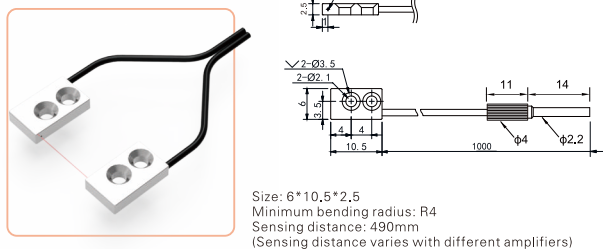

*PG1: TEGA with a threshold setting of 200;
PC1: 7-step with a threshold setting of 200.
*Cable length listed above can be customized.

Fiber Optic
Slot Sensors
Photoelectric
Laser
Proximity
Displacement
Magnetic
Contact
Area
Ultrasonic
Vision
Code Readers
Vibration
Temperature
Accessories

Guidance

Fiber amplifiers
Economical
Standard
Ultra high speed

Fiber components
Regular type
Array-type
Flat bracket type
Side-view type
High elastic type
High temperature resistant
Small spot type
Combination type
High end type

Fiber lens