High Temperature Resistant Type

Diffuse reflection

PD-H42Y

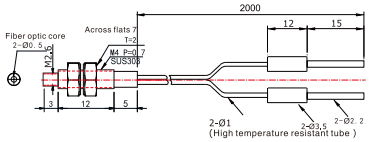

Size: M4
Max. temperature: 105℃
Sensing distance: 160mm
(Sensing distance varies with different amplifiers)

PD-H62Y

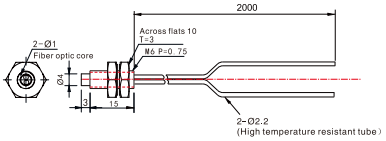

Size: M6
Max. temperature: 105℃
Sensing distance: 230mm
(Sensing distance varies with different amplifiers)

PD-H41E/H42E

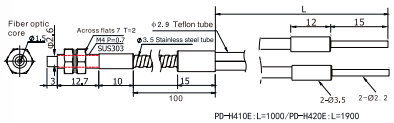

Size: M4
Max. temperature: 200℃

Sensing distance:
PC1:350mm
PG1:150mm

PD-H61E/H62E

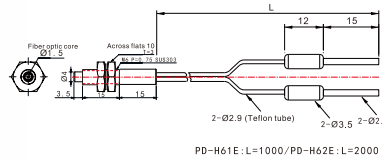

Size: M6
Max. temperature: 200℃
Sensing distance: 190mm/180mm
(Sensing distance varies with different amplifiers)

PD-H41S/H42S

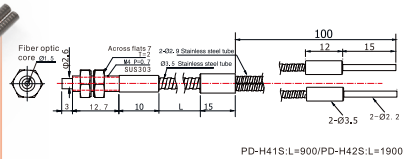

Size: M4
Max. temperature: 350℃

Sensing distance:
PC1:300mm
PG1:150mm

PD-H61S/H62S

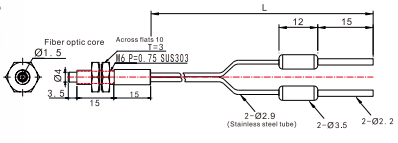

Size: M6
Max. temperature: 350℃
Sensing distance: 190mm/180mm

Sensing distance:
PG1:150mm

Thru-beam

PT-H42Y

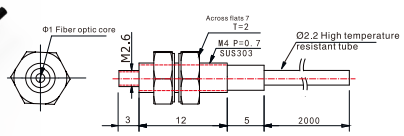

Size: M4
Max. temperature: 105℃

Sensing distance:
PC1:2300mm
PG1:700mm

PT-H41E/H42E



Size: M4
Max. temperature: 200℃
Sensing distance: 450mm/390mm
(Sensing distance varies with different amplifiers)

PT-H41S/H42S

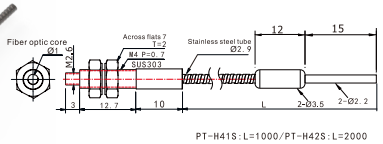

Size: M4
Max. temperature: 350℃

Sensing distance:
PC1:1500mm
PG1:600mm

*PG1: TEGA with a threshold setting of 200;
PC1: 7-step with a threshold setting of 200.
*Cable length listed above can be customized.